

天鵝牌無油式系列空氣壓縮機

OIL LESS TYPE

AIR COMPRESSORS



SD series

AIR COMPRESSORS

無油氣冷式空氣壓縮機



單件式連桿與軸承組

Single-piece Connection Rod
and Bearing.

高效率進排氣閥組

High Efficient Valve Assy.



特殊硬化處理之鋁合金汽缸

Aluminum alloy cylinder covered
with special hardened inner
surface treatment.

鋁合金活塞與壓縮環組

Aluminum alloy piston and
compression / Guide ring.

特殊精密零件組

YOUR BEST CHOICES

THE QUALITY DESIGN FOR DEEP COMMITMENT TO THE EXCELLENCE

2

汽缸
Cylinder

鋁合金材質，散熱性佳並經特殊硬化處理
Aluminum alloy material with better cooling effects. Cylinder covered with special inner surface treatment to ensure smooth running.

墊片
Gasket


石墨材質，耐高溫、無污染
Graphite material for reliable sealing and no contamination.

進、排氣閥組
Suction / Discharge valve assy

散熱快、噪音低、高效率、壽命長
Quick heat dissipation; low noise level; high efficiency; and longer working life.

導環、壓縮環
Compression ring and guide ring

自潤性與耐磨性的特殊材質
Self-lubricated and anti-friction material to ensure smooth running.

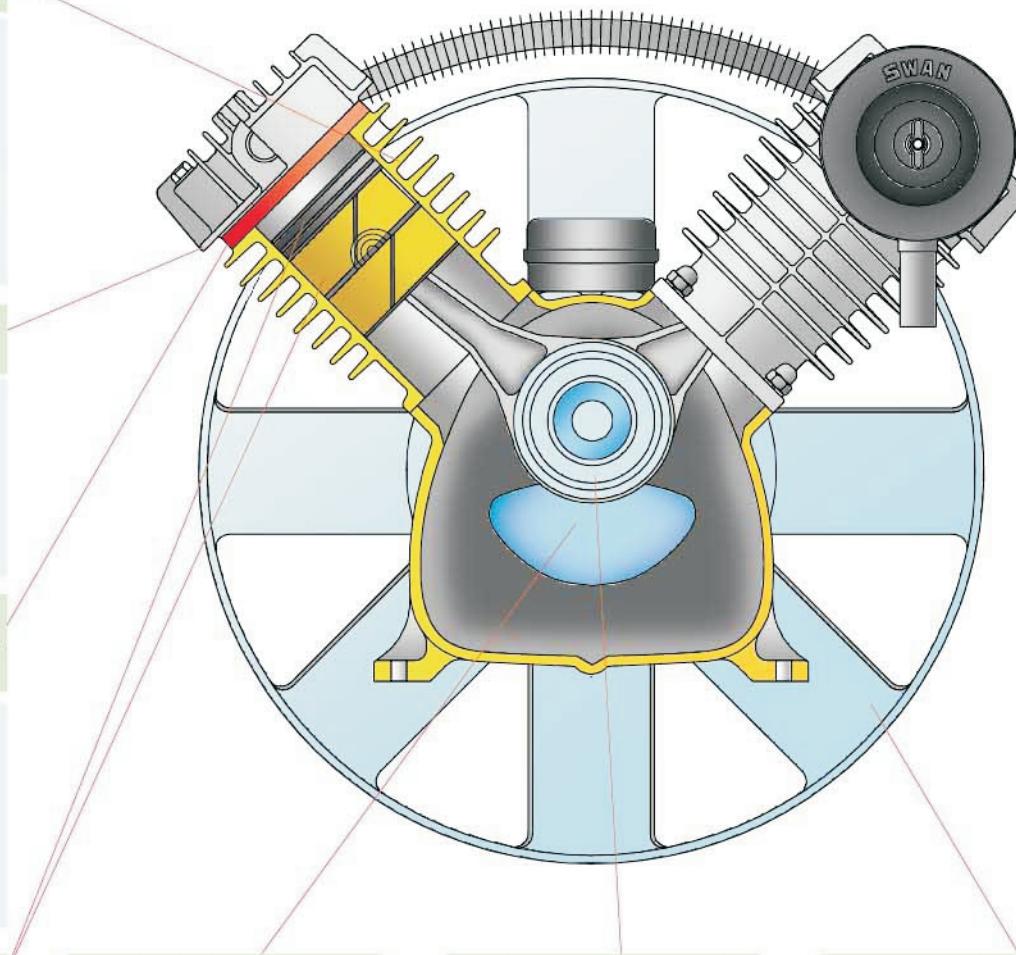

曲軸
Crankshaft

堅韌材質，平衡校正、中空設計，使用溫度降低、運轉平順
High grade ductile cast iron; hollow casting design with well balanced counterweight to make running smoothly and efficiently.


軸承系統
Bearing

全密軸承，填充特殊耐高溫油脂並使用特殊隔離斷熱材料
Totally enclosed with heat resistance grease and associated with special heat isolated material.

冷卻系統
Cooling system

經平衡校正的大型散熱輪；節省能源、不必額外的風扇馬達
Well balanced cooling fan provides sufficient cooling efficiencies and saves energy.

智慧型面板 Smart Controller

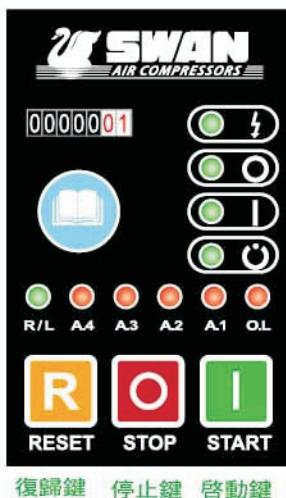

電源指示燈 Power Indicator
停止指示燈 Stop Indicator
運轉指示燈 Start Indicator
備機指示燈 Stand-by Indicator
電流過負載指示燈 Overload Indicator
遠端操作指示燈 Remote Indicator

復歸鍵 停止鍵 啓動鍵

- 特殊的設計，在空車啟動與空車停機時降低磨擦阻力對機械的傷害。
The distinctive design is able to make START/STOP of the compressor with low friction resistance and low voltage.
- 本機、遠端彈性化操控，選擇更人性化。
The electronic self-diagnosis system with remote control can display exactly the running conditions of the compressor.
- 智慧型自動控制，依使用量自動操控。
Use Auto Dual operating system to control air discharge quantity.
- 貼心設計，5組保護控制系統功能。
It can be set up to five protective systems based on customers' need.
- 操控面板指示燈顯示運轉狀態及操控一目了然。
Simple and visible indicators : Users friendly.

OIL-LESS AIR COMPRESSORS

3



SDU-203



SDU-205



SDU-310

SDU-307



SDU-415

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際排氣量 F.A.D. (l/min)	機體尺寸 Compressor Blocks Physical Dimension (mm)			重量 Weight (kg)
					L	W	H	
SDU(P)-203		3	8	285	570	450	565	52
SDU(P)-205		5	8	485	625	460	620	71
SDU(P)-307		7.5	8	730	720	520	690	90
SDU(P)-310		10	8	885	720	520	690	90
SDU(P)-415		15	8	1320	810	560	700	105

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

※SDP-XXX: 無自動卸壓機構

SDP-XXX : Without unloading mechanism.

※SDU-XXX: 具有自動卸壓機構

SDU-XXX : With unloading mechanism for idle running.



SDU-415



SDU-203



SDU-205

SDU-310
SDU-307

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際排氣量 F.A.D. (l/min)	氣筒容量 Tank Capacity (liter)	整機尺寸 Compressor Units Physical Dimension (mm)			重量 Weight (kg)
						L	W	H	
SDU-203		3	8	285	155	1480	520	950	150
SDU-205		5	8	485	240	1525	580	1200	230
SDU-307		7.5	8	730	300	1835	650	1300	250
SDU-310		10	8	885	300	1835	650	1300	250
SDU-415		15	8	1320	300	1835	650	1300	275

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

OIL-LESS AIR COMPRESSORS

5



SDP-310N

- 高壓力 $10\text{kg}/\text{cm}^2$ ，單段壓縮設計
Single stage with pressure up to $10\text{ kg}/\text{cm}^2$
- 高效能冷卻系統
High efficient cooling system

後部冷卻器(選項)
After cooler(option)



SDU-430

- 無油・無空氣污染
Oil-free , No air pollution
- 堅固結構設計
Robust structure design
- 非常穩定可靠
Very reliable and durable

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際排氣量 F.A.D. (l/min)	機體尺寸 Compressor Blocks Physical Dimension (mm)			重量 Weight (kg)
					L	W	H	
SDP-205N		5	10	427	625	460	600	71
SDP-310N		10	10	799	720	522	680	90
SDP-415N		15	10	1056	799	538	666	105
SDU(P)-420		20	8	1635	1143	799	826	321
SDU(P)-425		25	8	2037	1143	799	826	321
SDU(P)-430		30	8	2495	1143	799	826	321

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

※ SDP-XXX: 無自動卸壓機構

SDP-XXX : Without unloading mechanism.

※ SDU-XXX: 具有自動卸壓機構

SDU-XXX : With unloading mechanism for idle running.



- 高壓力 $12\text{kg}/\text{cm}^2$ ，雙段壓縮設計
Two stage design with pressure up to $12\text{ kg}/\text{cm}^2$

- 高效能冷卻系統
(大風量風扇&高效率冷卻器)
High efficient cooling system

HDP-415

- 高效率、高品質組件設計
High efficient , high quality components.



HDU-430

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際排氣量 F.A.D. (l/min)	機體尺寸 Compressor Blocks Physical Dimension (mm)			重量 Weight (kg)
					L	W	H	
HDP-205		5	12	389	610	460	585	89
HDP-310		10	12	834	702	515	680	113
HDP-415		15	12	1250	769	538	666	142
HDU(P)-420		20	12	1540	1088	883	826	355
HDU(P)-425		25	12	1849	1088	883	826	355
HDU(P)-430		30	12	2211	1088	883	826	355

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

OIL-LESS AIR COMPRESSORS

7



SDT-205

- 單機、雙機交替選擇運轉，使用彈性化
Single or Double air compressors running alternatively for flexible usage.
- 卓越的服務、合理的價格
Excellent Service . Attractive Price
- 值得性賴、優越的性能
High Reliable . Superior Performance



GP-510

規格 型式 Model	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際排氣量 F.A.D. (l/min)	整機尺寸 Compressor Units Physical Dimension (mm)			重量 Weight (kg)
				L	W	H	
SDT-205	5X2	8	485X2=970	1780	610	1150	435
SDT-310	10X2	8	885X2=1770	1900	730	1330	615
SDT-415	15X2	8	1225X2=2450	2050	800	1300	883
GP-510	5	8	485	1440	1230	1400	400

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

● 精緻，不佔空間設計
Super compact design

● 高效率卻系統
High efficient cooling air system

● 馬達過熱保護功能
Motor thermal cut-off

● 高耐用性及高可靠性
Durable and Reliable



SK-101



PV-202

ATH-16R
(air tank)

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	排氣量 Displacement (l/min)		氣筒容量 Tank Capacity (liter)	整機尺寸 Compressor Units Physical Dimension (mm)			重量 Weight (kg)	
							L	W	H		
				143	172		420	290	580		
SK-101		1	10			16	420	290	580	26	
ATH-16R		---	10	---		16	420	245	325	7	
PV-202		2	10	126	118	30	452	424	730	49	

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

OIL-LESS AIR COMPRESSORS

9



吸附式乾燥器
Integrated Adsorption Air Dryer

無油式雙機體
Oilless Twin Pump

不鏽鋼儲氣桶
Stainless air tank

DT-175-2C



DT-175-1C
SA-175-1C



DT-175-2C
SA-175-2C

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	排氣量 Displacement (l/min)		氣筒容量 Tank Capacity (liter)	尺寸 Dimension (mm)			重量 Weight (kg)	噪音值 Noise Level (dB)	乾燥器 Dryer				
				50Hz	60Hz		L	W	H							
DT-175-1C		1	7	122	147	23	500	540	840	83	60	●				
SA-175-1C		1	7	122	147	23	500	540	840	75	60	—				
DT-175-2C		1 X 2	7	122X2	147X2	39	660	560	840	100	62	●				
SA-175-2C		1 X 2	7	122X2	147X2	39	660	560	840	92	62	—				

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.



PROV2000

- 精緻，不佔空間設計
Super compact design
- 高效率卻系統
High efficient cooling air system
- 馬達過熱保護功能
Motor thermal cut-off
- 高耐用性及高可靠性
Durable and Reliable



DR-115-TD



DR-115-30L



DR-115-22L

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	排氣量 Displacement (l/min)		氣筒容量 Tank Capacity (liter)	尺寸 Dimension (mm)			重量 Weight (kg)	乾燥器 Dryer
				50Hz	60Hz		L	W	H		
DR-115-TD	1.5 X 2	7	122X2	147X2	50	850	460	680	65	●	
DR-115-22L	1.5	7	122	147	22	610	300	600	27	—	
DR-115-30L	1.5	7	122	147	30	400	410	880	34	—	
PROV2000	1.5	7	122	147	55	765	385	842	57	—	

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

SDC series

AIR COMPRESSORS

箱型靜音式空氣壓縮機



綠朋友

它安靜的運轉，不佔地方的，簡單的操作，實用的控制，不必費心維護，這些考量我們都為您做到了！

Oilless Clean Air

-More advanced, quiet, reliable

The successful oilless silent model will deliver clean air and greatly reduce the noise level. In addition, the less floor space, and users' friendly interface, combined with the optimized controller can monitor the working status and improve its reliability.



SDU-203C-1
SDU-205C-1

- 靜音運作
Very silent operation
- 高流量空氣冷卻系統，提升運轉效率
High-capacity cooling air system for improving performance
- 節能電子控制系統
Energy-saving electronic control system



SDU-307C-1
SDU-310C-1

型式 Model	規格 Size	馬達 (HP)	使用壓力 W.P. (kg/cm ²)	實際排氣量 F.A.D. (l/min)	尺寸 Dimension (mm)			重量 Weight (kg)	噪音值 Noise Level (dB)
					L	W	H		
SDU-203C-1		3	8	285	850	730	1280	195	70
SDU-205C-1		5	8	485	850	730	1280	210	70
SDU-307C-1		7.5	8	730	960	830	1460	315	73
SDU-310C-1		10	8	885	960	830	1460	330	73
SDU-415C-1		15	8	1225	1000	970	1270	539	75

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

ALL IN ONE series

AIR COMPRESSORS

無油多機能空氣壓縮機



好夥伴

您希望配套齊全，一站式的服務！

現在，空壓機、乾燥機、過濾器、自動
洩水、整合控制，即接即用，全在這白
色箱體裡，多方便，省了空間，少了配
管，多方便！

*Reliable package with exceptional value,
Compact, Convenient and Low running cost
All-in-One package Integrates Air Dryer,Air filter,
Auto Drain System to provide you highest
quality compressed air .*



無油式清淨化系列

SWAN無油清淨化系列是一部結合功能與性能的美學作品。

結合乾燥機與過濾器，使無油的空氣更加潔淨，不含水份，適合電子、實驗室、食品製造等多種行業的空氣品質要求。

一體式的IC控制，整合啟動、空車、散熱、洩水、停機，各機聯控各種功能，輕觸面板一切OK。

沒有污染，安靜運轉，節省能源，自動控制，您的需求，一機滿足。

SWAN OIL LESS, All-In-One CD SERIES....

Outstanding all-in-one design, Excellent performance.

with integrated air dryer and filter to provide you optimal clean and dry air, very suitable for high quality air demands in electronic, pharmaceutical, food, laboratory applications.

Single piece of IC control board comprises functions of starting, idling, cooling, water-drain, stopping and sequential control. Simply operated by ONE TOUCH.

Clean, Quiet, Energy saving and Auto control features... SWAN CD can meet with all you needs.

OIL-LESS AIR COMPRESSORS

● 清靜化無油式空壓機

空壓機、乾燥機、過濾器、自動洩水

整合控制、省空間，操控容易

All IN ONE OIL-LESS AIR COMPRESSOR

Compact, Convenient and Lower running cost-

Air Compressor . Air Dryer . Air Filter and Centralized Auto Drain are all integrated together to become one complete set.



SDU-310CD



SDU-205CD

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際 排氣量 F.A.D. (l/min)	尺寸 Dimension (mm)			重量 Weight (kg)	噪音值 Noise Level (dB)	乾燥機 Air Dryer	過濾器 Air Filter
					L	W	H				
SDU-205CD		5	8	451	850	730	1470	326	65	●	ARB ARA
SDU-310CD		10	8	793	960	830	1740	366	70	●	ARB ARA

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.



SDU-415CD



SDU-430CD

型式 Model	規格 Size	馬達 Motor (HP)	使用壓力 W.P. (kg/cm ²)	實際 排氣量 F.A.D. (l/min)	尺寸 Dimension (mm)			重量 Weight (kg)	噪音值 Noise Level (dB)	乾燥機 Air Dryer	過濾器 Air Filter
					L	W	H				
SDU-415CD		15	8	1225	1000	970	1690	660	75	●	ARB ARA
SDU-430CD		15x2	8	1225x2	1830	970	1690	1196	76	●	ARB ARA

※ 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

※ 規格外之壓力、排氣量、傳動方式，歡迎訂購，詳細資料請隨時與本公司洽商。

Other discharge, pressure and drive type available upon request.

OIL-LESS AIR COMPRESSORS

Integrated Refrigerated Air Dryer
冷凍室乾燥機

Cartridge Air Filters
過濾器

Inverter:
The core of Energy-saving
變頻器

Multiple, simple control mechanism
全自動控制

After Cooler
後部冷卻器

Reliable Oil-Less Compressor Pump
無油式壓縮機體



Centralized Auto Drain
自動洩水閥

無油變頻式系列

SWAN無油變頻式系列

SWAN以先進的技術及精密的加工技術，提供高效能的無油式變頻壓縮機，滿足您對環境保護與能源節省的雙重要求。

SWAN OIL LESS, All-In-One VSD SERIES

Through advanced and precise engineering design, SWAN offers high performance VSD series oil-less compressor with frequency control of motor speed to meet with all your requirements for energy saving and environmental protection, now and in the future.

簡單方便低費用

空壓機、乾燥機、過濾器合理的整合，空間也方便使用。

COMPACT, CONVENIENT AND LOWER RUNNING COST


All-In-One package Integrates air dryer and air filtration together to save space.

貼心的設計

一體式的自動洩水裝置，可調整使用壓力的設計，穩定的使用壓力，極低的差異 ΔP 0.1 bar。

USERS FRIENDLY DESIGN

Centralized Auto-Drain, adjustable air pressure setting, stable working pressure, with pressure drop (ΔP) to be less than 0.1 bar.

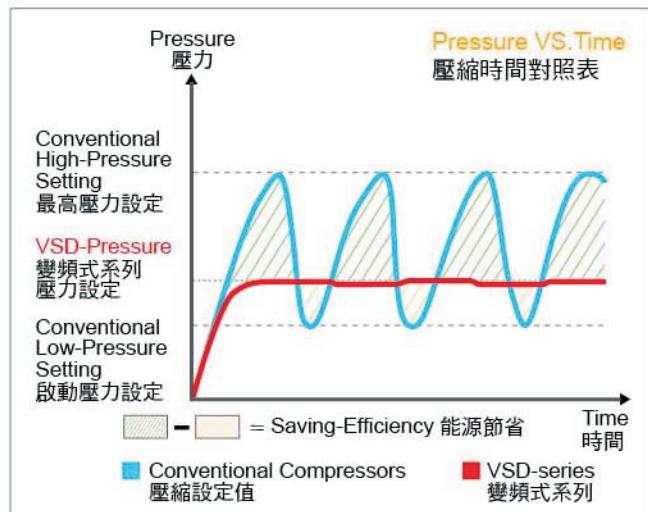

環保幫手

變頻式的設計，依需求調整轉速，節省能源。

全無油的設計，沒有油污染的問題。

獨特的設計，長使用壽命，低維修成本。

ENVIRONMENT FRIENDLY

Variable speed design with soft starting mechanism result-in low energy consumption.

Unique design concept based on longer working life and low maintenance.

Completely oil-free design to guarantee no oil pollution.

AIR DRYER & AIR FILTER

高效率的熱交換系統

利用特殊對向擾流構造提高擾流效果，以極高的熱交換效率得到低露點的乾燥空氣。

實用的自動控制

微電腦控制，長時間穩定運轉，避免壓縮機經常啓閉造成的震動和故障。

低壓力降與最適使用設計

專為高溫多濕的環境設計，管路最佳化以減少壓力差的損失；針對不同馬力設計最適之工作壓力與入口溫度，提升空壓系統使用效能。

符合環保的冷媒系統

全系列採用R-407C或R-134a符合環保的冷媒。控制單純實用，易操作、易調整，結構簡單堅固、少保養、少故障。

Highly Efficient Heat Exchangers

Highly grade finned coil type Heat Exchanger to maximize heat transfer by the ample heat exchanging surface.

Intelligent Microprocessor Control

Microprocessor control system ensures the stable and quiet running; avoids starting/stopping vibration and breakdown.

Effective & Proven Design

Heavy duty reliable design which totally meet the working requirements under the warm and high humidity ambient conditions. Ample heat exchanger and efficient air circuit design make the pressure drop to the least.

Environmental Protection

Using environmental friendly refrigerant R-407C or R-134a for all models. Dependable control system, easy operation, solid construction, least maintenance, and highest reliability-all in one.



規 格 Size		型 式 Model		SDE-4E	SDE-8E	SDE-15E	SDE-22A	SDE-37A	SDE-55A	SDE-75A	SDE-110A	SDE-150A	SDE-180A
處理量		Flow Rate(m³/min)		0.6	1.0	2.4	4.4	7	9.8	14	22	30	36
出口露點		Dew Point.(°C)		3 ~ 15			2 ~ 10						
入口溫度		Inlet Temp.(°C)		55以下			50以下						
環境溫度		Ambient Temp.(°C)		32			40						
工作壓力		W.P.(bar)		2 ~ 10			2 ~ 10						
管徑		In/Out		1/2"	3/4"	1"	1"	1 1/2"	1 1/2"	2"	3"		
電源		Power		1Ø			3Ø						
冷媒型式		Type of Refrigerant		R-134a	R-134a	R-407C	R-407C						
	長		L(mm)	254	254	254	254	305	305	470	780	780	950
尺寸	寬	Size	W(mm)	722	722	797	816	963	963	973	1280	1280	1800
	高		H(mm)	515	515	626	626	922	922	1139	1420	1420	1620
重 量 (kgs)		Weight(kgs)		34	34	42	42	70	88	95	280	300	400
適用馬力 (hp)		Applicable Ranges(hp)		5	5~10	10~20	20~30	30~50	50~75	75~100	100~150	150~200	200~250

● 處理能量更大或異電壓機型，規範或交期請洽本公司。

Bigger capacity and special electric voltage, contact us for spec, and delivery time.

● 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.

管路過濾器(ARF)

作為前過濾使用，除去空氣中髒污粉塵過濾精度 $1\mu\text{m}$ 。

油霧過濾器(ARB)

一般工業使用，除去空氣中大部分油分最大含油量 0.1ppm 。

精密過濾器(ARA)

儀控、氣控、高級塗裝等須高品質空氣的行業使用，最大含油量 0.01ppm 。

除臭過濾器(ACA)

食品、製藥、半導體等行業使用，除去空氣中微細油份及異味，最大含油量 0.003ppm 。

Main Line Filter (ARF)

For the removal of dust particles down to $1\mu\text{m}$.

Oil Removal Filter (ARB)

For the removal of oil vapor down to 0.1 ppm .

Micro Filter (ARA)

For the removal of microparticles down to 0.01ppm .

Active Carbon Filter (ACA)

For the removal of mini oil mist and odor down to 0.003 ppm .


● 註明

- 處理流量更大的過濾器，未備庫存，詳細規範和交期請洽本公司。
- 不同型式過濾器在額定流量下，差壓各有不同。
- 自動排水器及差壓計為選用件。
- Bigger capacity also available, contact us for information.
- Differential pressure is different in different types of filters.
- Auto-Drain and differential pressure gauge are optional.




規格 SPECIFICATION

型 號 Model no.	處理流量 FLOW RATES nl/min	適用馬力 APPLICABLE RANGES HP	使用壓力 MAX.W.P kg/cm ²	接續口 徑 IN/OUT	尺 寸(圖號FIG) DIMENSION AxBxC*D(mm)
ARB 04A	530	1-5HP		牙口 1/4"	94x211x50x21 (圖一) FIG1
ARA 04A	ACA 04A				
ARB 08A	1750	5-10HP		牙口 1/2"	94x286x50x21 (圖一) FIG1
ARA 08A	ACA 08A				
ARB 15A	3116	10-20HP		牙口 3/4"	128x323x60x32 (圖一) FIG1
ARA 15A	ACA 15A				
ARB 22A	5000	20-30HP		牙口 1"	128x378x60x32 (圖一) FIG1
ARA 22A	ACA 22A				
ARB 55A	11660	30-75HP	16 kg/cm ²	牙口 1-1/2"	190x560x80x50 (圖一) FIG1
ARA 55A	ACA 55A				
ARB 75A	16660	75-100HP		牙口 2"	190x659x80x50 (圖一) FIG1
ARA 75A	ACA 75A				
ARB 90A	20000	100-125HP		牙口 2-1/2"	190x680x110x52 (圖一) FIG1
ARA 90A	ACA 90A				
ARB 125	25000	125-175HP		法蘭 3"	240x635x80x61 (圖二) FIG2
ARA 125	ACA 125				
ARB 220	36600	175-300HP		法蘭 3"	240x985x80x61 (圖二) FIG2
ARA 220	ACA 220				

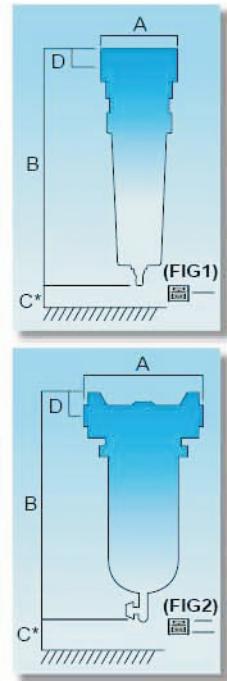

Compressed Air Cleaning System

Comprehensive range of filters to meet requirements from different industrial users.

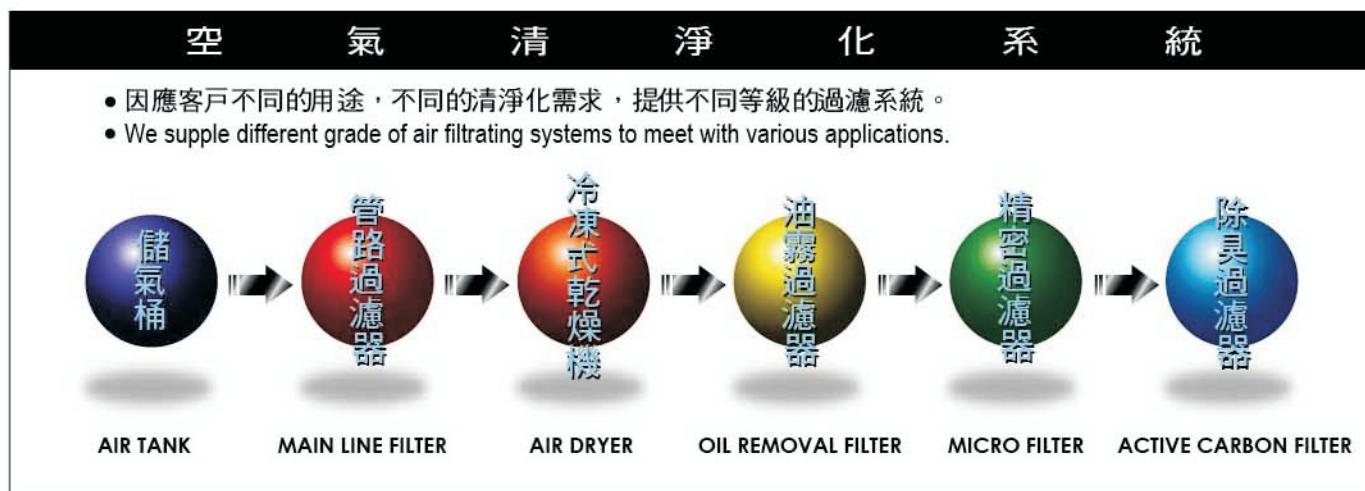

標準組合選配表 Recommended Air Filtration Combination

項目 Item	型號 Model	SDU-203	SDU-307	SDU-415	SA-175-1C	DT-175-1C	SDU-205CD	SDU-310CD	SDU-415CD	SDU-430CD
		SDU-205	SDU-310	SDU-415C	SA-175-2C	DT-175-2C	DR-115-TD			
管路過濾器 Main Line Filter	—	—	ARF 15A	—	—	—	—	ARF 15A	ARF 22A	
冷凍式乾燥機 Air Dryer	SDE-4E	SDE-8E	SDE-15E	SDE-4E	內建 Built In					
油霧過濾器 Oil Removal Filter	ARB 04A	ARB 08A	ARB 15A	ARB 04A	ARB 04A	內建 Built In	內建 Built In	內建 Built In	內建 Built In	
精密過濾器 Micro Filter	ARA 04A	ARA 08A	ARA 15A	ARA 04A	ARA 04A	內建 Built In	內建 Built In	內建 Built In	內建 Built In	
除臭過濾器 Active Carbon Filter	ACA 04A	ACA 08A	ACA 15A	ACA 04A	ACA 04A	ACA 04A	ACA 08A	ACA 15A	ACA 22A	

● 處理能量更大或異電壓機型，規範或交期請洽本公司。

Bigger capacity and special electric voltage, contact us for spec, and delivery time.

● 公司不斷研究改進，規格如有變更，恕不另行通知。

Keep on searching for excellence, we reserve the right to alter specifications without prior notice.



東正鐵工廠 股份有限公司

公司：台中市東區信義街116號
TEL:886-4-2261-2135 FAX:886-4-2261-5465
廠址：台中市南區大慶街二段16號
TEL:886-4-2261-2135 FAX:886-4-2262-8246
公司網站：www.swanair.com.tw
電子郵件：swantc@swanair.com.tw

台北營業所：新北市五股區五權五路43號
TEL:02-2299-1285 FAX:02-2298-2296
台中營業所：台中市南區大慶街二段16號
TEL:04-2261-2135 FAX:04-2261-5465
台南營業所：臺南市永康區中正南路635號
TEL:06-253-9848 FAX:06-253-9849

TONG CHENG IRON WORKS CO., LTD.

Head office :
16 Shing Yee St., Sec.2, Taichung, Taiwan
TEL:886-4-2261-2135 FAX:886-4-2262-8246

Reg. Office :
116 Shing Yee St., Taichung, Taiwan
TEL:886-4-2261-2135 FAX:886-4-2261-5465

website:www.swanair.com.tw
E-Mail:swantc@swanair.com.tw



ISO 9001:2008



TC-2015.05-A